




## ***Flux Detector for the dry stop (without liquid)***

Application Flux Detector model

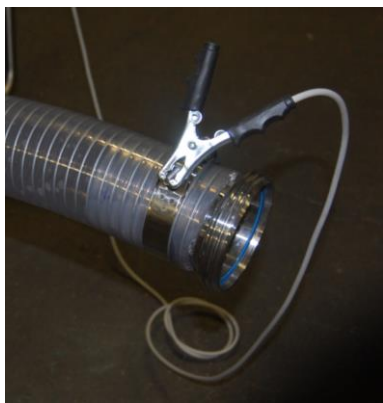

### **TECHNICAL FEATURES:**

- Adaptable and installable on any type of BCM pump with AISI stainless steel trolley (mod.30-40-50-60-70-80-100 also with variator).
- Simplicity in the use and management of the function
- Stopping the pump in the absence of liquid
- Stop memory effect in case of liquid return
- Switchboard on board
- Enable / Disable function for initial filling of the pipes
- Visual diagnostics of the operation and status of the pump
- Protection in case of lack of input phase
- Possibility of connection on standard EXT wire connector for pump start / stop control.
- Three-phase 380 Vac and single-phase 220Vac power supply
- Universal model available separately on stainless steel structure on pump without reset
- Powers available up to 15 kW with direct start
- Higher powers with the use of inverters
- Electrical panel size 300x220x120 (mm)

**Dedicated and guaranteed technical service and assistance**

Company site



Where to access



**B.C.M. Macchine Enologiche**

Via Veneto 10 Zona Artigianale Saonara (PD)

Tel +39 049-640372 Fax +39 049-5018355

Marketing & Service:

[info@bcmenologia.com](mailto:info@bcmenologia.com)

[www.bcmenologia.com](http://www.bcmenologia.com)